


Daikin Altherma low temperature split

EHBX-CB

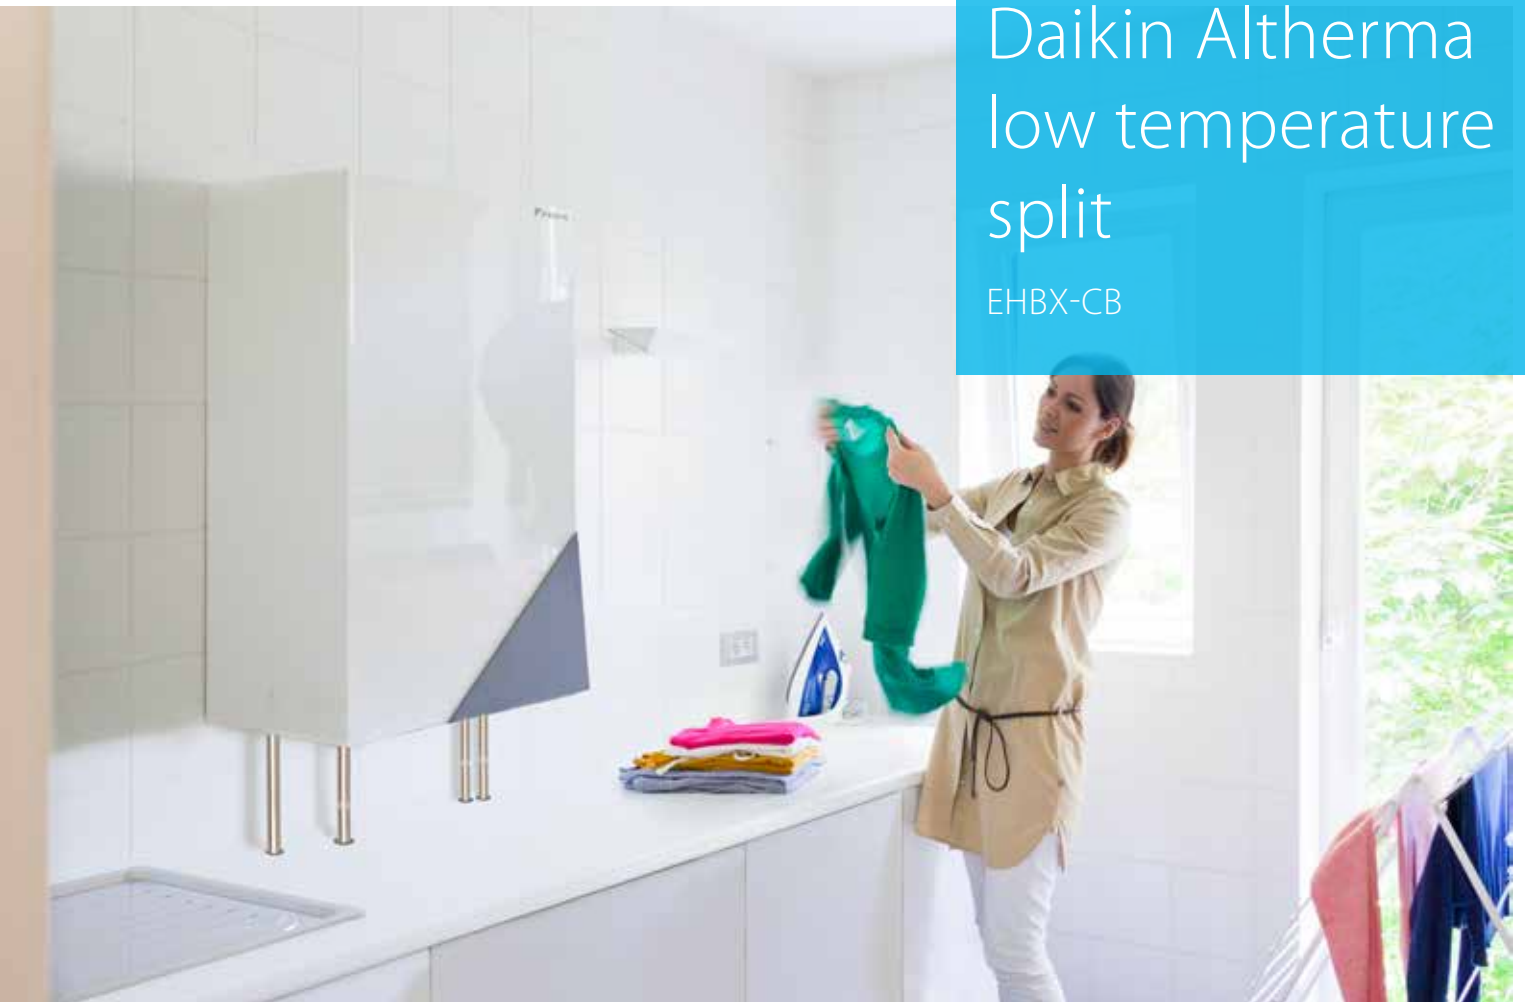

Guaranteed
operation
down to -20°C

Wall mounted reversible air to water heat pump
ideal for low energy houses

- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Wall mounted indoor unit
- › Energy efficient heating and cooling system based on air to water heat pump technology
- › Flexible configuration with respect to heat emitters
- › Possible to combine with domestic hot water
- › Outdoor unit extracts heat from the outdoor air, even at -20°C


EHBX-CB + ERHQ-BV3/BW1



Efficiency data				EHBX + ERHQ	11CB3V/9W + 011BV3	16CB3V/9W + 014BV3	16CB3V/9W + 016BV3	11CB3V/9W + 011BW1	16CB3V/9W + 014BW1	16CB3V/9W + 016BW1					
Heating capacity	Nom.		kW	11.2 (1) / 10.3 (2)	14.0 (1) / 13.1 (2)	16.0 (1) / 15.2 (2)	11.3 (1) / 11.0 (2)	14.5 (1) / 13.6 (2)	16.1 (1) / 15.1 (2)						
Cooling capacity	Nom.		kW	13.9 (1) / 10.0 (2)	17.3 (1) / 12.5 (2)	17.8 (1) / 13.1 (2)	15.1 (1) / 11.7 (2)	16.1 (1) / 12.6 (2)	16.8 (1) / 13.1 (2)						
Power input	Heating	Nom.	kW	2.55 (1) / 3.17 (2)	3.26 (1) / 4.04 (2)	3.92 (1) / 4.75 (2)	2.63 (1) / 3.24 (2)	3.42 (1) / 4.21 (2)	3.82 (1) / 4.69 (2)						
	Cooling	Nom.	kW	3.86 (1) / 3.69 (2)	5.86 (1) / 5.69 (2)	6.87 (1) / 5.95 (2)	4.53 (1) / 4.31 (2)	5.43 (1) / 5.08 (2)	6.16 (1) / 5.73 (2)						
COP				4.39 (1) / 3.25 (2)	4.29 (1) / 3.24 (2)	4.08 (1) / 3.20 (2)	4.30 (1) / 3.39 (2)	4.24 (1) / 3.22 (2)	4.20 (1) / 3.22 (2)						
EER				3.60 (1) / 2.71 (2)	2.95 (1) / 2.32 (2)	2.59 (1) / 2.20 (2)	3.32 (1) / 2.72 (2)	2.96 (1) / 2.47 (2)	2.72 (1) / 2.29 (2)						
Domestic hot water heating	General	Declared load profile		-											
	Average climate	η_{wh} (water heating efficiency)		-											
			Water heating energy efficiency class		-										
Space heating	Average climate water outlet 55°C	General	SCOP	2.86	2.82	2.92	2.90	2.80	2.96						
				η_s (Seasonal space heating efficiency)	112	110	114	113	109	115					
				Seasonal space heating eff. class	A+										
	Average climate water outlet 35°C	General	SCOP	2.99	3.23	3.29	3.08	3.34	3.33						
				η_s (Seasonal space heating efficiency)	117	126	129	120	131	130					
				Seasonal space heating eff. class	A	A+			A	A+					
Indoor Unit				EHBX	11CB3V/9W	16CB3V/9W	16CB3V/9W	11CB3V/9W	16CB3V/9W	16CB3V/9W					
Casing	Colour	White													
	Material	Precoated sheet metal													
Dimensions	Unit	HeightxWidthxDepth	mm	890x480x344											
Weight	Unit		kg	43	45	44	46	44	46	43	45	44	46	44	46
Operation range	Heating	Water side	Min.~Max.	15~55											
	Cooling	Water side	Min.~Max.	5~22											
	Domestic hot water	Water side	Min.~Max.	25~80											
Refrigerant	Charge	TCO ₂ eq		-											
	GWP			2,087.5											
Sound power level	Nom.		dB(A)	41	44				41	44					
Sound pressure level	Nom.		dB(A)	27	30				27	30					
Outdoor Unit				ERHQ	011BV3	014BV3	016BV3	011BW1	014BW1	016BW1					
Dimensions	Unit	HeightxWidthxDepth	mm	1,170x900x320					1,345x900x320						
Weight	Unit		kg	102					108						
Compressor	Quantity	1													
	Type	Hermetically sealed scroll compressor													
Operation range	Cooling	Min.~Max.	°CDB	10.0~46.0											
	Domestic hot water	Min.~Max.	°CDB	-20~35											
Refrigerant	Type / GWP	R-410A / 2,087.5													
	Charge	kg / TCO ₂ eq		2.7 / 5.6					3.0 / 6.3						
	Control	Expansion valve (electronic type)													
Sound power level	Heating	Nom.	dB(A)	64			66	64			66				
	Cooling	Nom.	dB(A)	64	66		69	64	66		69				
Sound pressure level	Heating	Nom.	dB(A)	49	51		53	51		52					
	Cooling	Nom.	dB(A)	50	52		54	50	52		54				
Power supply	Name/Phase/Frequency/Voltage	Hz/V		V3/1~/50/230					W1/3N~/50/400						
Current	Recommended fuses		A	32					20						

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
 (3) Contains fluorinated greenhouse gases

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN16-763 10/15



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.